

## Trouble Shooting

### Remote Does Not Operate

- Confirm that the Remote is within 30' of the receiver.
- Confirm that the battery is fresh and properly installed. Refer to Page 1 of this guide for instructions on battery installation.
- Unplug the receiver from the USB port. Wait 30 seconds. Plug the receiver back into the USB port. Wait for Windows to recognize the receiver again.
- Perform ID Change as described on pg. 1.

### Remote Range is Reduced

- Replace the battery in the Remote.

### Hub Operation

- Windows 2000 does not support multi-device receivers when used with USB 2.0 hubs.
- Plug receiver directly into computer.

## Technical Support

If you have any difficulties installing or using your VersaPoint Communicator Remote, please recheck the section of this User's Guide that relates to your problem. If you are still unable to solve the problem, please visit the support section of our Web site or email/call our Product Support team for assistance.

Hours: 8 am to 5 pm, PST

Tel: (800) 340-1331 or (805) 484-1331 • Fax: (805) 484-8989

Email: support@interlinkelec.com

Please be prepared to provide the following information:

- Date and place of purchase
- Brand and model of computer
- Software you use with this product

## FCC Certification

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation. This equipment has been tested and found to comply with the limits for a CLASS B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential installation. This equipment generates, uses, can radiate radio frequency energy and if not installed and used in accordance with the instruction guide, may cause harmful interference to radio communications. However, there is no guarantee that this radio interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures: Re-orient or relocate the receiving antenna using the supplied cable. Increase the separation between the equipment and the receiver. Consult the dealer or an experienced Radio-TV technician for help. Notice: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This product is equipped with a shielded cable. Extension cables are not recommended, if used, they must be shielded in order to comply with the emission limits.



www.interlinkelectronics.com • 546 Flynn Road, Camarillo, CA 93012

© 2003 Interlink Electronics, Inc. All rights reserved.

VersaPoint, VersaPoint Communicator Remote, the six dot logo and Interlink Electronics are registered trademarks of Interlink Electronics, Inc. All other trademarks are the property of their respective owners.

VersaPoint Communicator Remote User's Guide • Model No. VP6425 • P/N 90-27878 Rev. A


# VERAPOINT® Communicator remote

Model No. VP6425

## Installation

### 1. Install the battery (included)

Open the battery compartment on the underside of the remote by using a small coin to turn the round door clockwise. Insert one CR2032 Lithium watch battery, assuring the positive (+) side is out. Close the compartment by replacing the door and turning it counterclockwise.



- If Windows asks you for the Windows CD, follow the dialog box instructions.
- If Windows displays dialog boxes, click "Next" on all dialog boxes, then "Finish."

### 3. Test the Installation

Open any PowerPoint presentation. Press the center button on the remote. The presentation should start in "Slide Show" mode. If the Remote does not operate as described, refer to Pg. 2, Troubleshooting.

Note: VersaPoint Communicator Remote supports Windows 98, Windows 98SE, Windows ME, Windows 2000 and Windows XP. Windows 95 and Windows NT are not supported.


### 2. Install the USB Receiver


Plug the receiver into a USB port on your PC. Windows will take a few moments to automatically load the proper drivers.

## Operation

The VersaPoint Communicator Remote is the perfect way to give a presentation. Simply load your presentation into Microsoft® PowerPoint® and go.

And because the Remote is RF Wireless, you don't have to point it at the receiver. You're free to move around and interact with your audience.

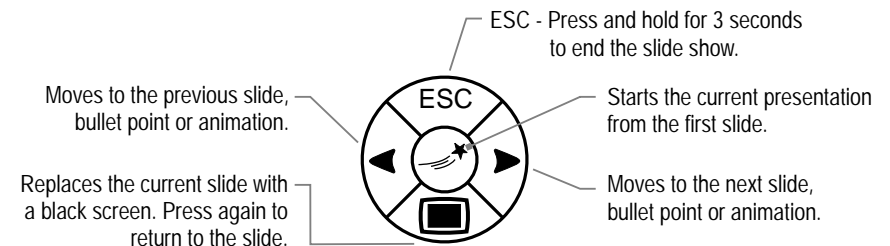

Notes: The VersaPoint Communicator Remote supports Microsoft PowerPoint. PowerPoint 97 does not support the  button to start the presentation.

## ID Change

The Remote transmits an ID number to the receiver. Should you wish to use two or more Remotes in close proximity, you can change the ID number. There are 64 unique IDs, allowing the use of up to 64 Remotes within RF transmission range of each other (up to 30').

1. While holding the ESC button, press and hold the Blank Screen button down until the LEDs begin to blink. After releasing the buttons, wait until the LEDs go out.
2. Using an unfolded paper clip, poke the ID Change button on the top of the receiver.
3. Within 20 seconds, press any button on the remote.
4. Test the installation as described above.

With the receiver installed and your computer powered up, perform the following steps: